

Spiral Anchor Instructions



1.) Crank the leg down about 6" lower where you want to install the anchor. Slip the cleat bracket onto the leg and Tighten in place about 12" to 18" above the decking.



2.) Thread rope from anchor through the bottom of the installation T-bar.



3.) Pull rope tight and feed loop on the top of the spiral anchor into bottom of the installation T-bar. The loop fits at a diagonal. Give it a little tap on the ground to lock it in there snug.



4.) Hold onto rope and slide your hand up the installation T-bar.



5.) Drop anchor down into the water, holding onto rope.




6.) Place spiral anchor where you want it and make a few turns by hand.



7.) Slip the T-handle onto the post and tighten in place. Tie the rope around the "T".



8.) Turn the anchor down 1-2 feet into the hard ground.

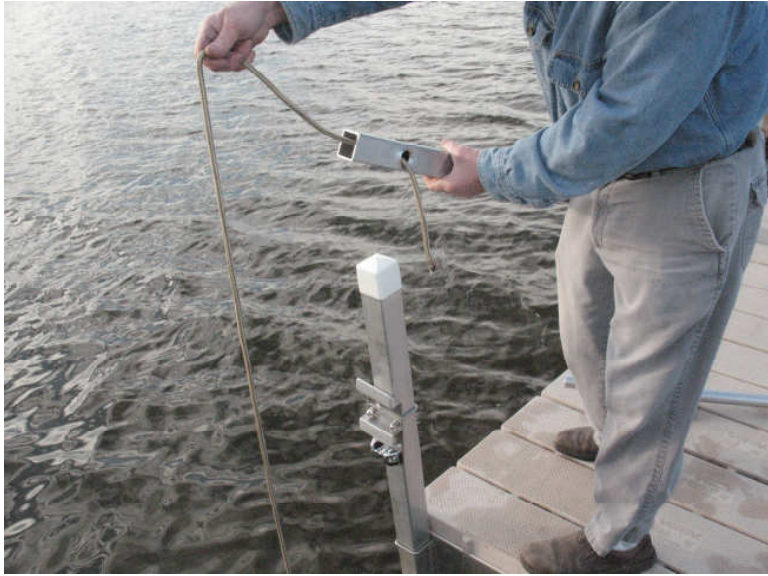


9.) Once you have the spiral anchor where you want it pull upward on the T-bar to release it from the anchor and pull the rope out.



10.) Pull the rope through the quick-locking cleat.



11.) Step back and pull the rope taut. Crank the leg back up to the desired level.

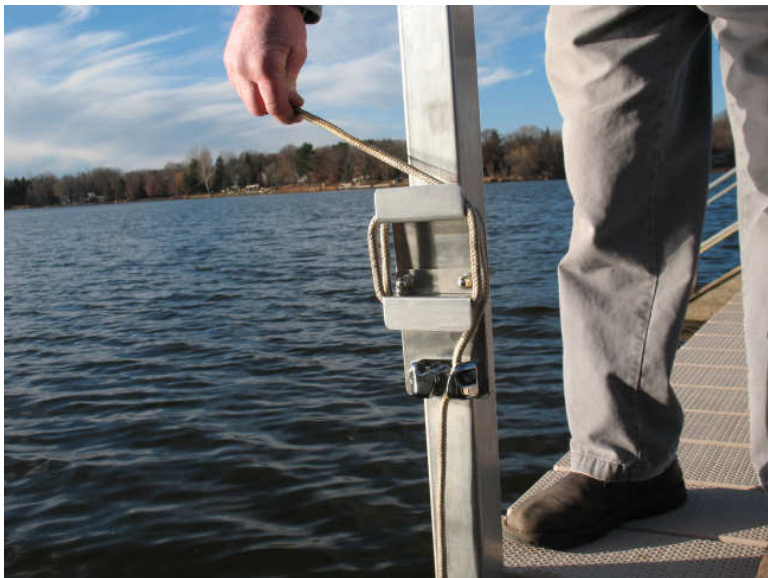

12.) Wrap the excess rope around the tabs on the bracket.