



2015 Models and Older (wheels & connecting pins facing the lake end of the dock)
Adding a New 16' V-Dock Section to an Existing V-Dock

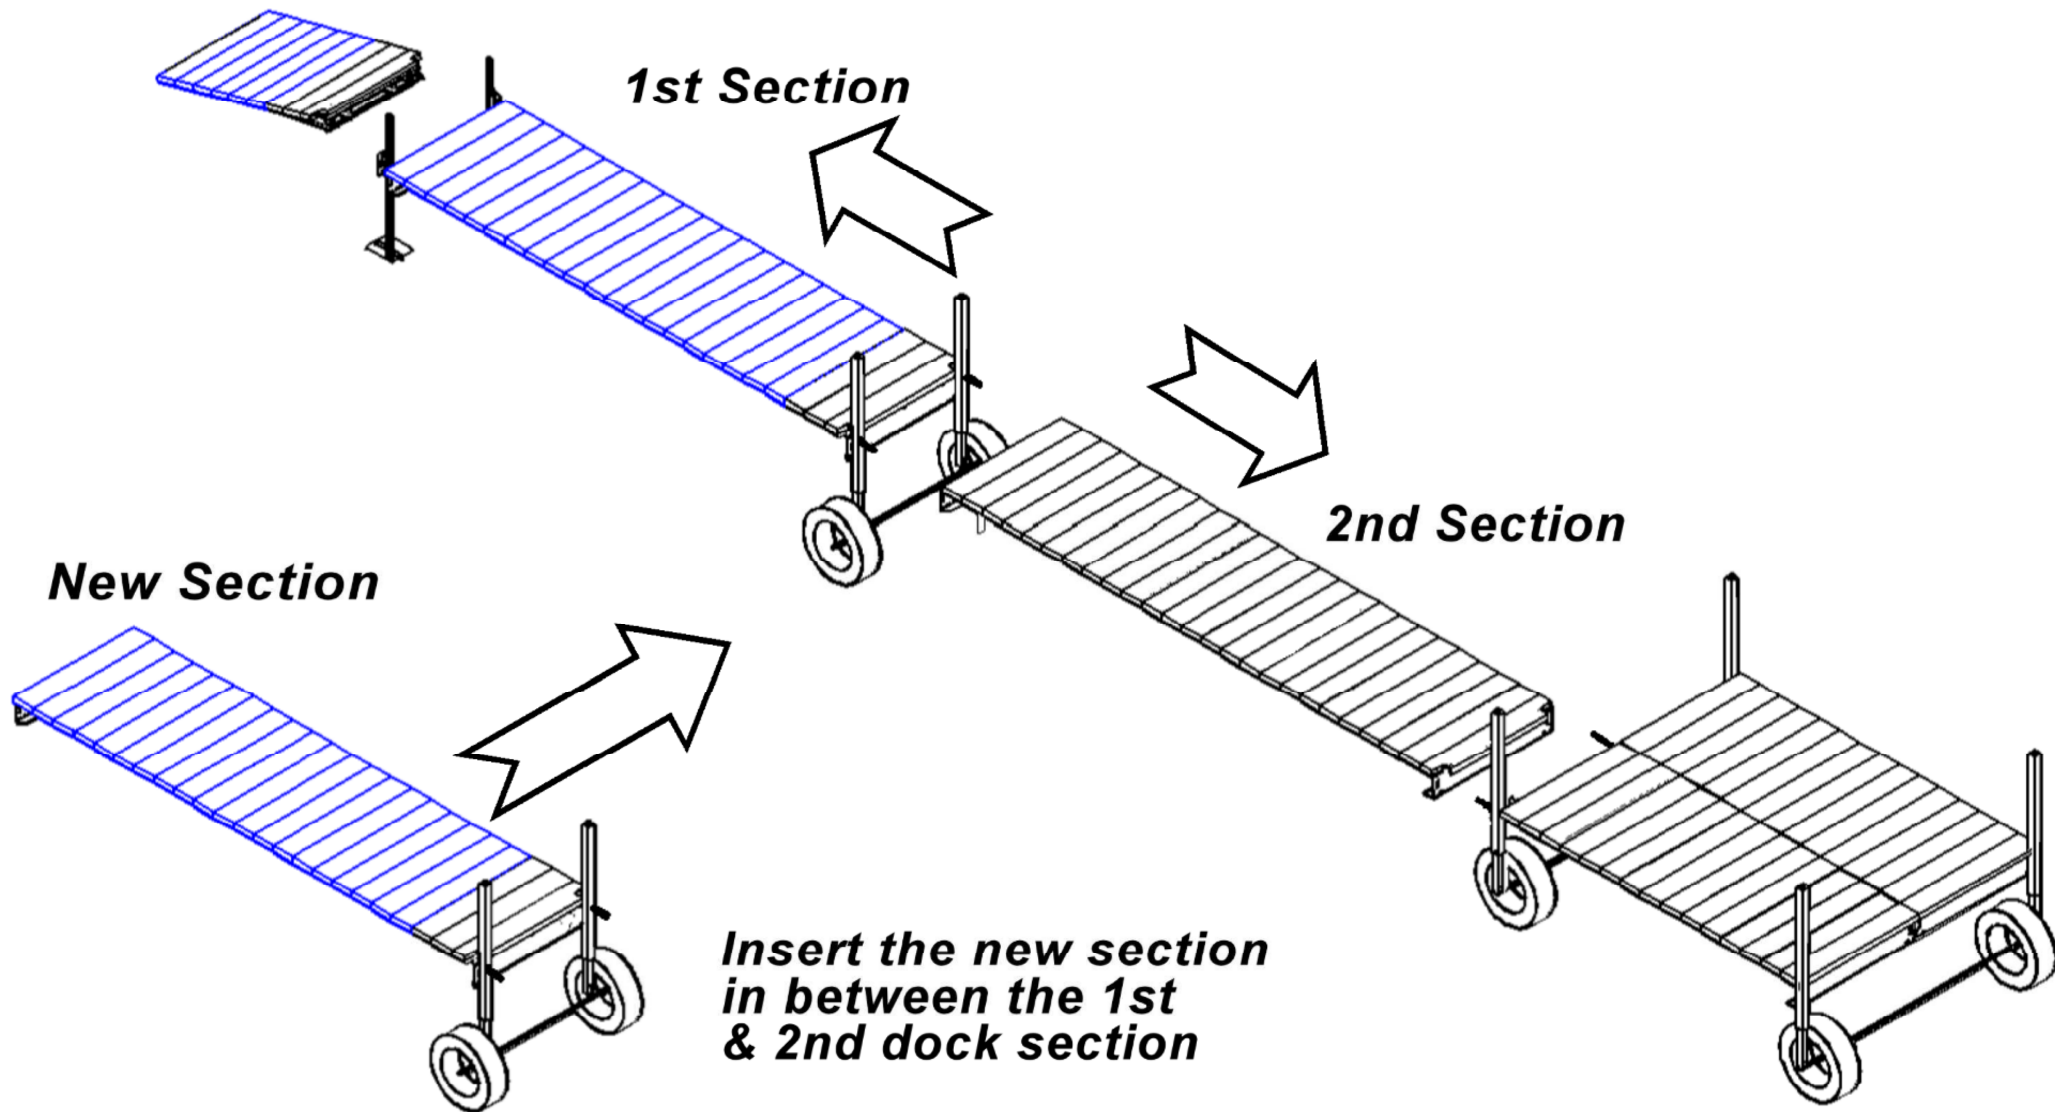


2016 models and newer (wheels and connecting pins facing the shore)
adding a new 16' section to existing V-Dock

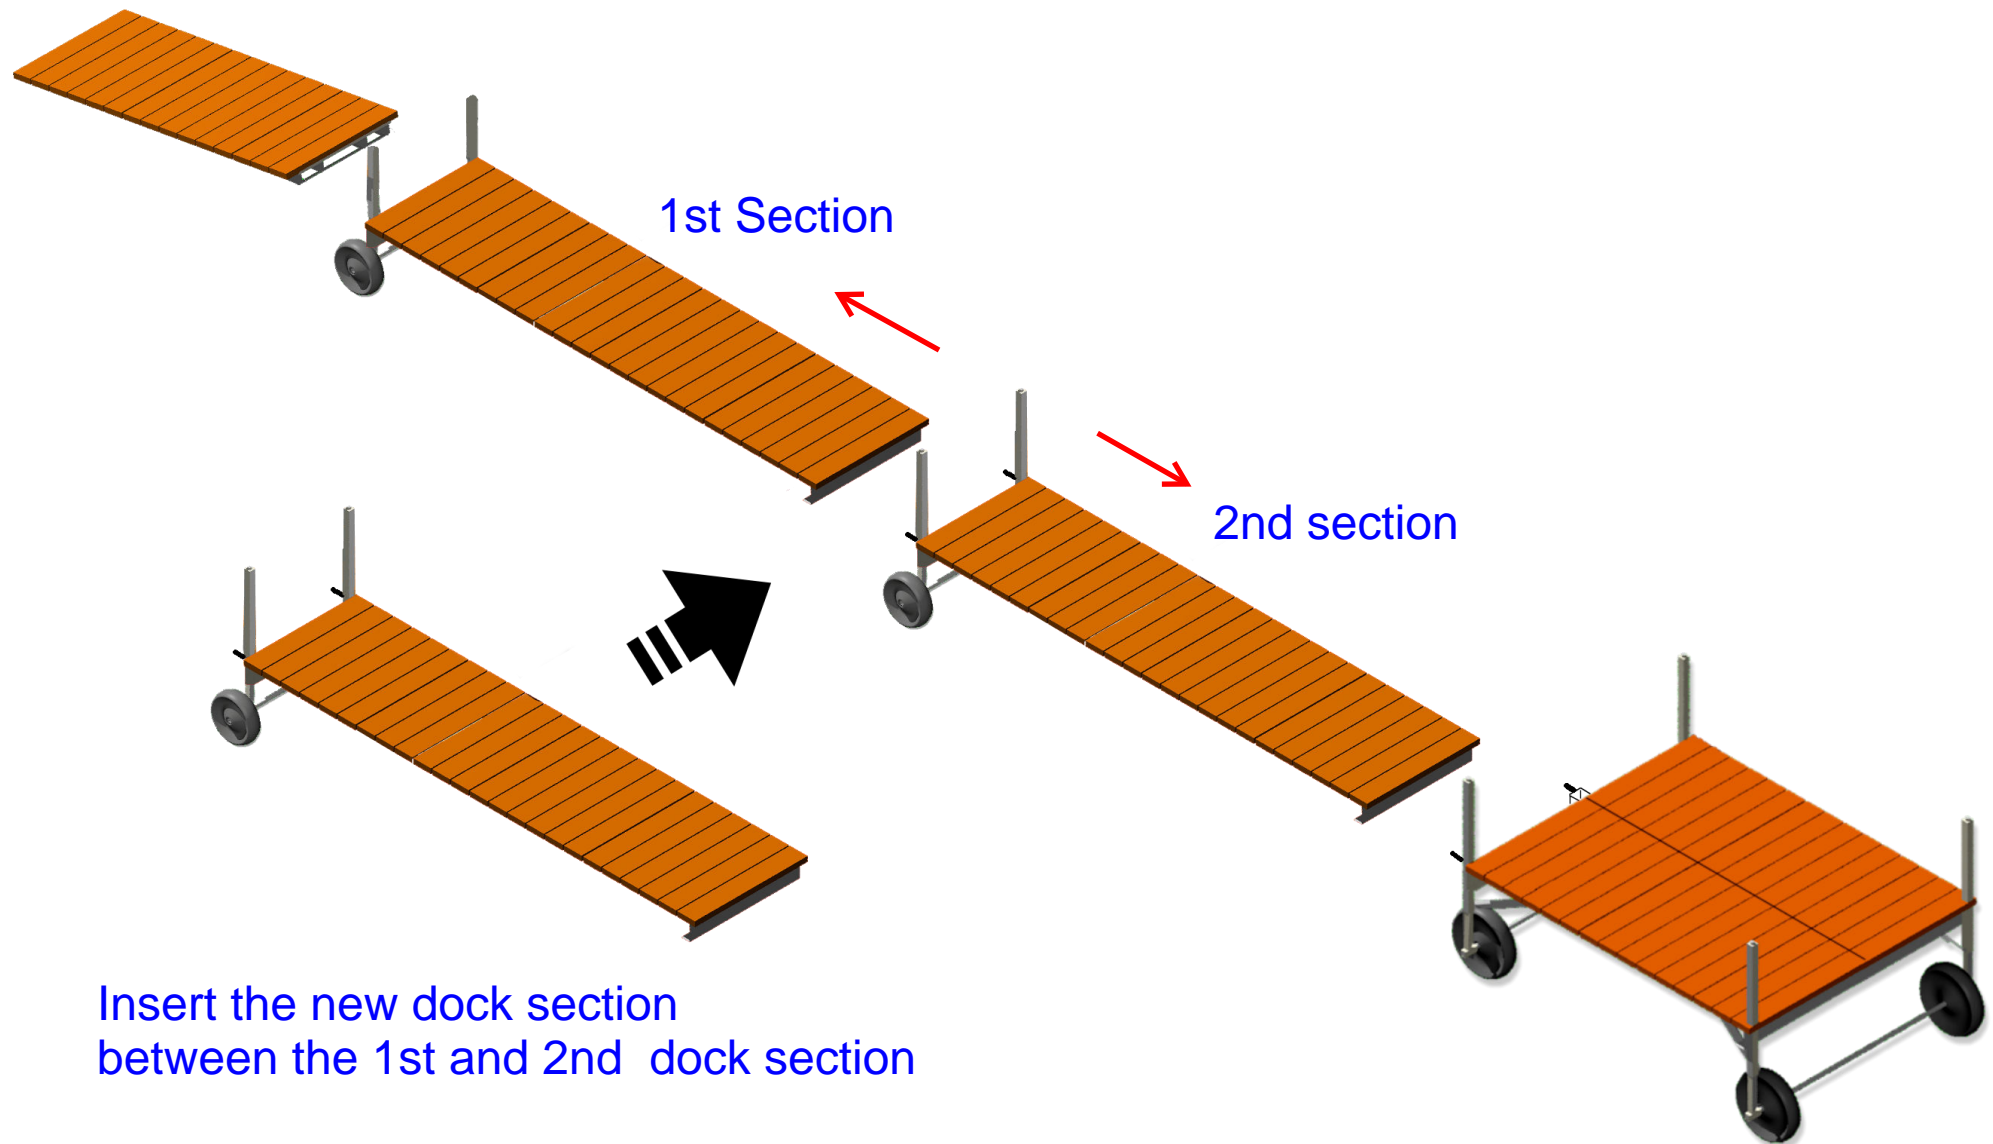



V-Dock Axle Instructions



Slide axle into bottom of legs and attach with a spring bolt & lock nut

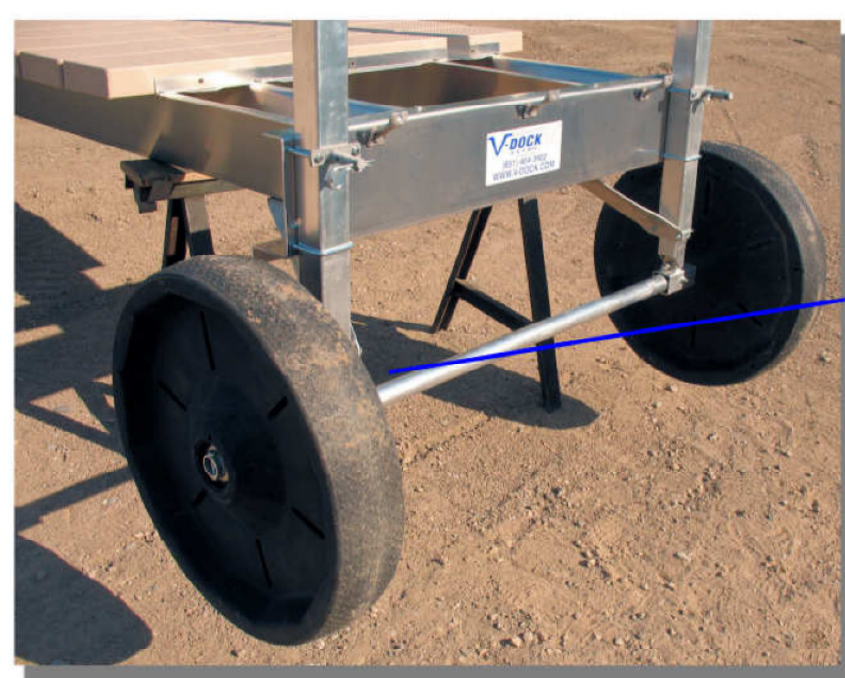

Tire removed to show clarity

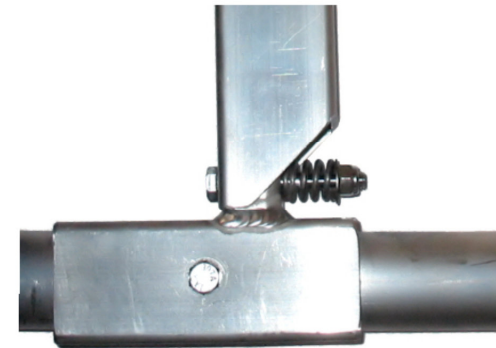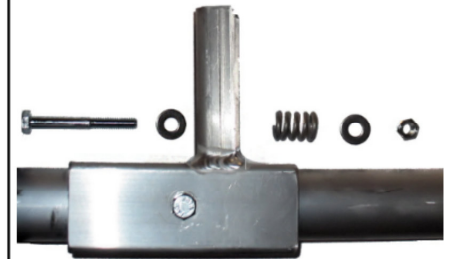

Note: tighten the lock nut so some of the threads just go beyond the lock nut (leaving the spring flexible)

The same process is for the 8' wide and 12 wide axles