



20' Telescoping flagpole instructions (2018)



Remove the telescoping flagpole from the bag and remove one end of the black foam to extend the flagpole. Next Slide the larger flag connector down the narrowest part of the flagpole. Next slide the small flag connector on to the top part of the narrowest part of the flagpole.
(Note this to be a very tight fit connection so you may need to press hard)

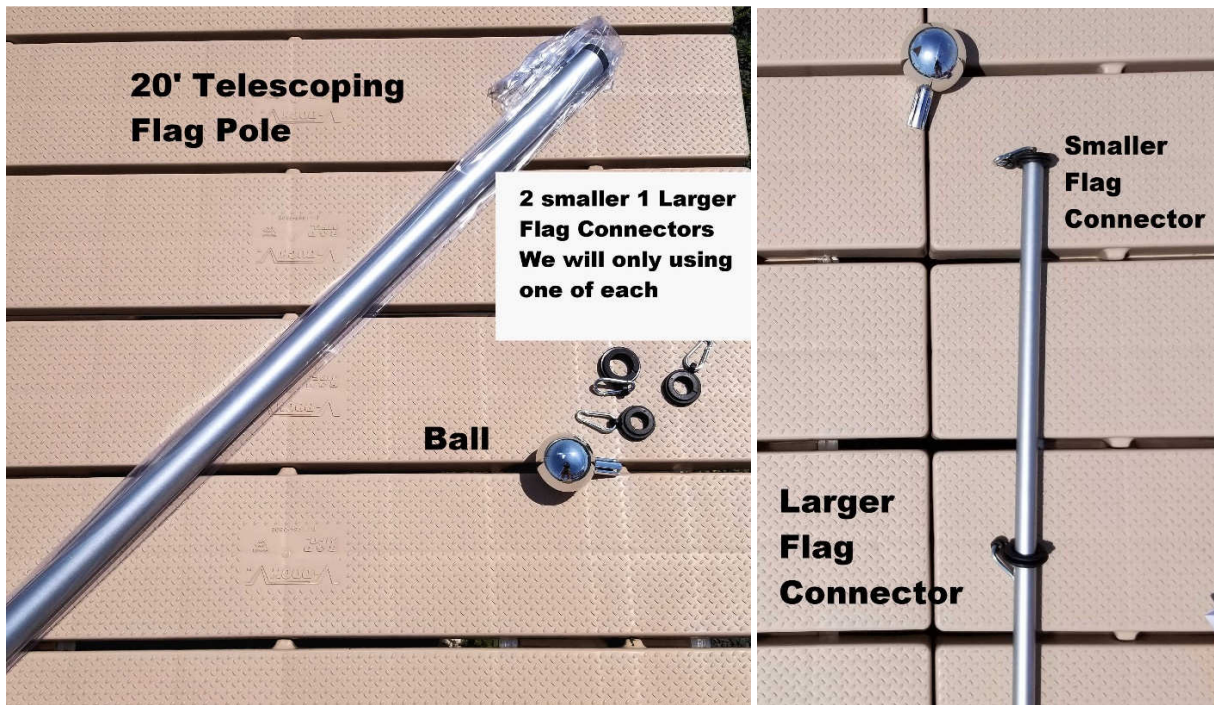

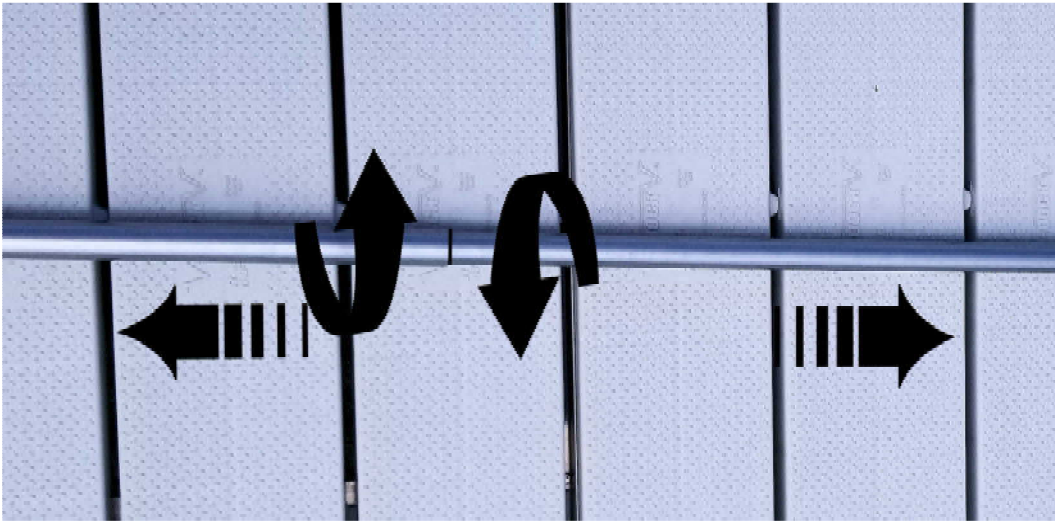


Extend each part of the flagpole out and twist securely but don't over tighten



For 2 ½ in. Square Posts attachments

Fasten the U-bolts as shown and tighten with a ½ wrench then slide in the flag pole.

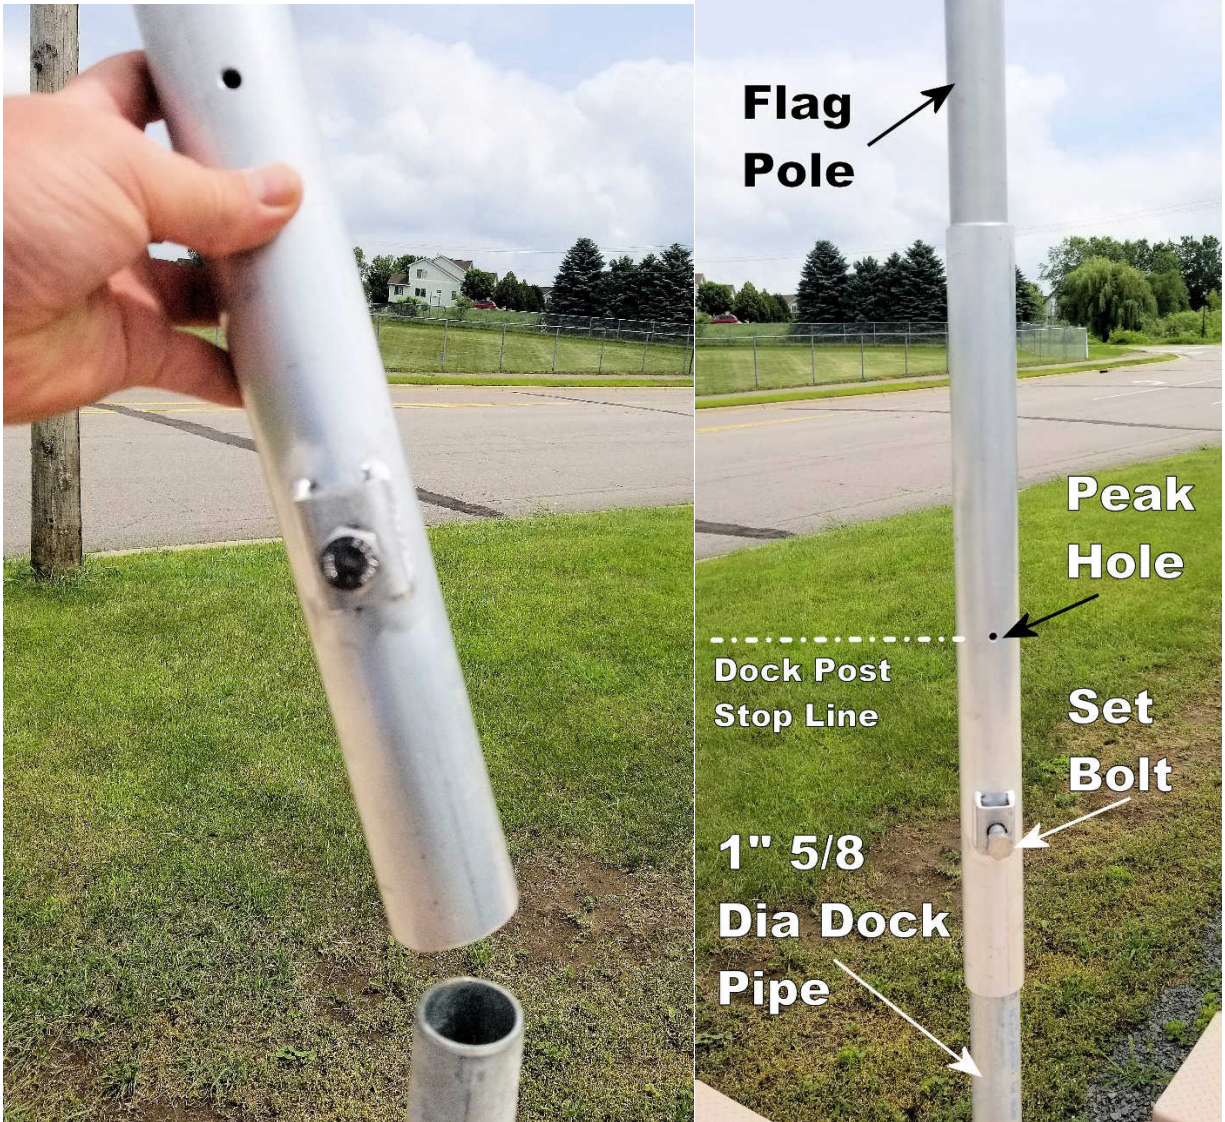

For the round Post attachment slide the attachment over an 1 5/8" round post. Loosen the set bolt, slide the round post brackets until you see the dock post in the peak hole. Then re-tighten the set bolted and slide the flagpole in to the bracket.

Enjoy!

V-Dock warranties other manufacturers products for one year from the date of purchase. In case of a storm do not stand outside next to the flagpole. Also if the storm is known to becoming it's best to lower the flag and remove. V-Dock's warranty does not cover acts of God.