



Shore Wheel Companion Instructions



Slide the ramp off and remove the first deck panel on the shore end of the dock.

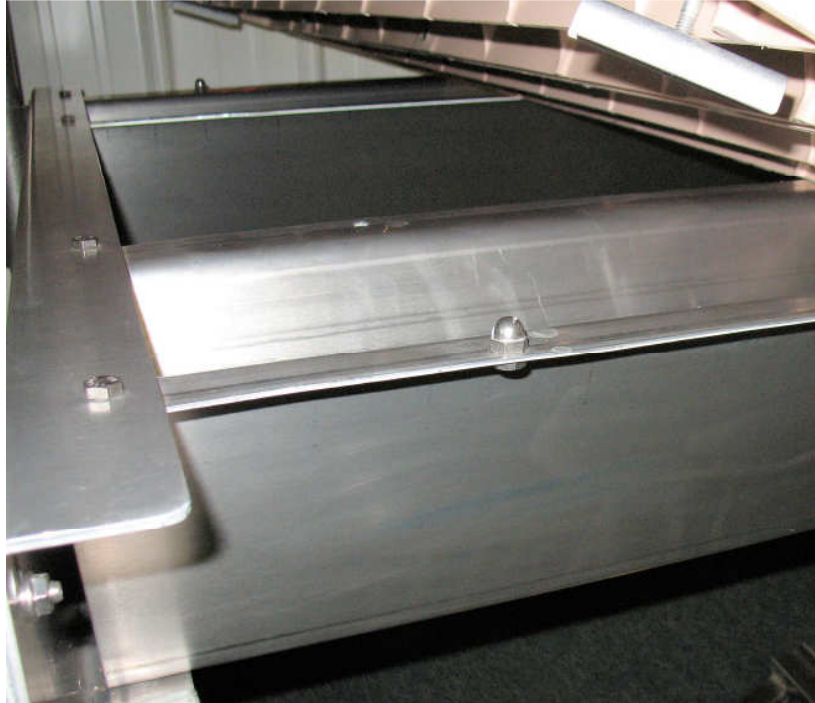


Next, install reinforcement tabs on the left and right side of the shore end channel, where you removed the decking in the previous step. Remove both 5/16" bolts and nuts, install tabs, and re-secure nuts and bolts as shown.

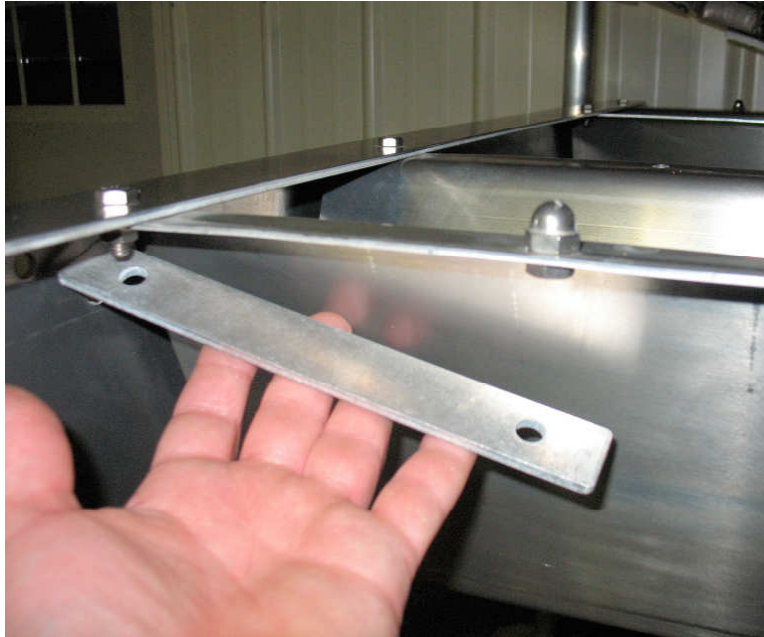

Reinstall the first deck panel.


Using the shore wheel companion nut and washer and insert the two prongs where the ramp was once located.

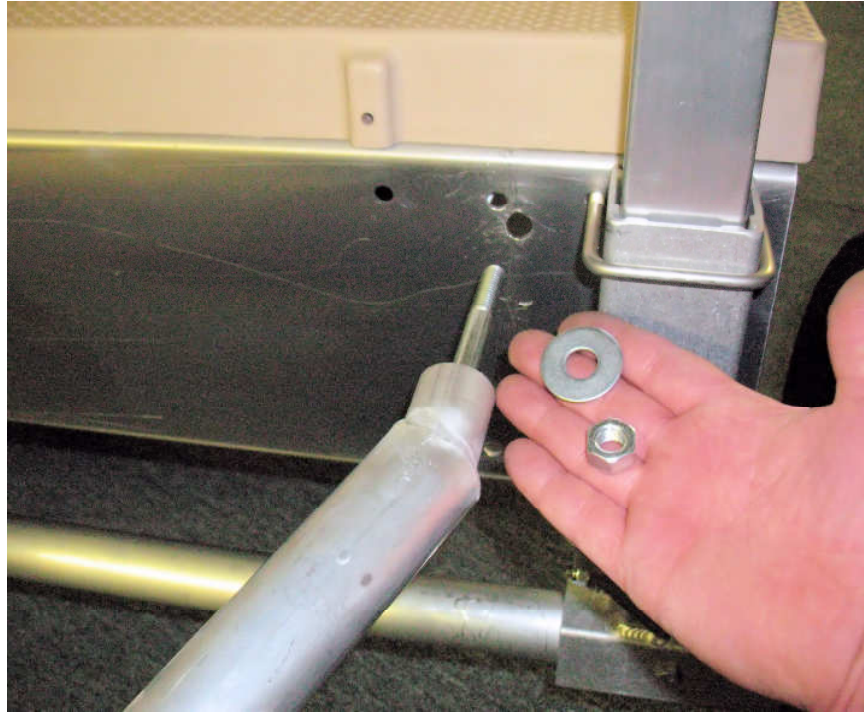

Secure with the washer and nut on the other side of the end channel as shown.



Note: Tongue can extend up to 10 feet or shorten it up if you prefer. Do this by removing and the bolt and nut, extending the tongue in or out, and then re-fasten the bolt.

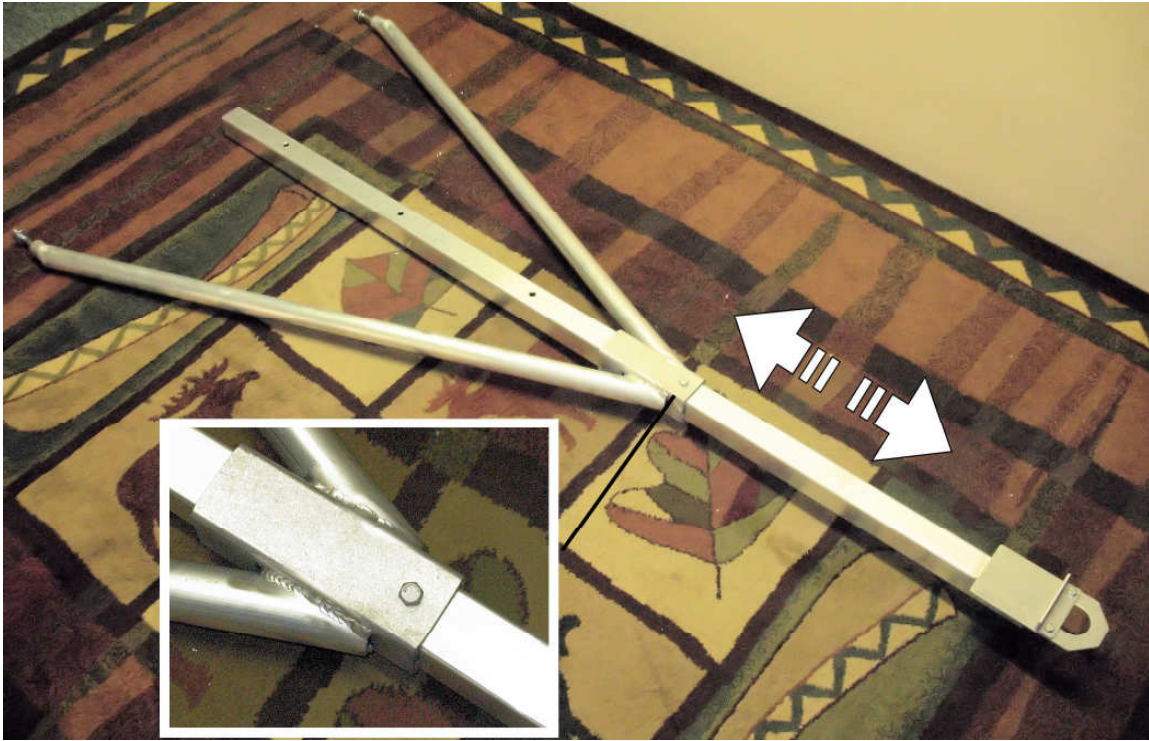

To lock the latch onto a ball, remove the one bolt with the flange nut. The other bolt, with the lock nut, will allow the latch to swing. After placing the tongue over the ball, re-secure the latch with the bolt you removed and tighten the flange nut.

Now you're ready to move your dock.

Remember pull very slowly and have a 2nd person as a lookout.

