

Boat Lift Easy Step




Instructions


Note: If you have a post sectional dock you will need a mud auger to anchor the opposite side of the dock from the Boat Lift Easy Step (BLES) as shown here to prevent flipping



Unbolt the lower swing bracket from the top claw bracket. Then place the claw part of the BLES between the boards where the J-bolt and swivel clip is located.

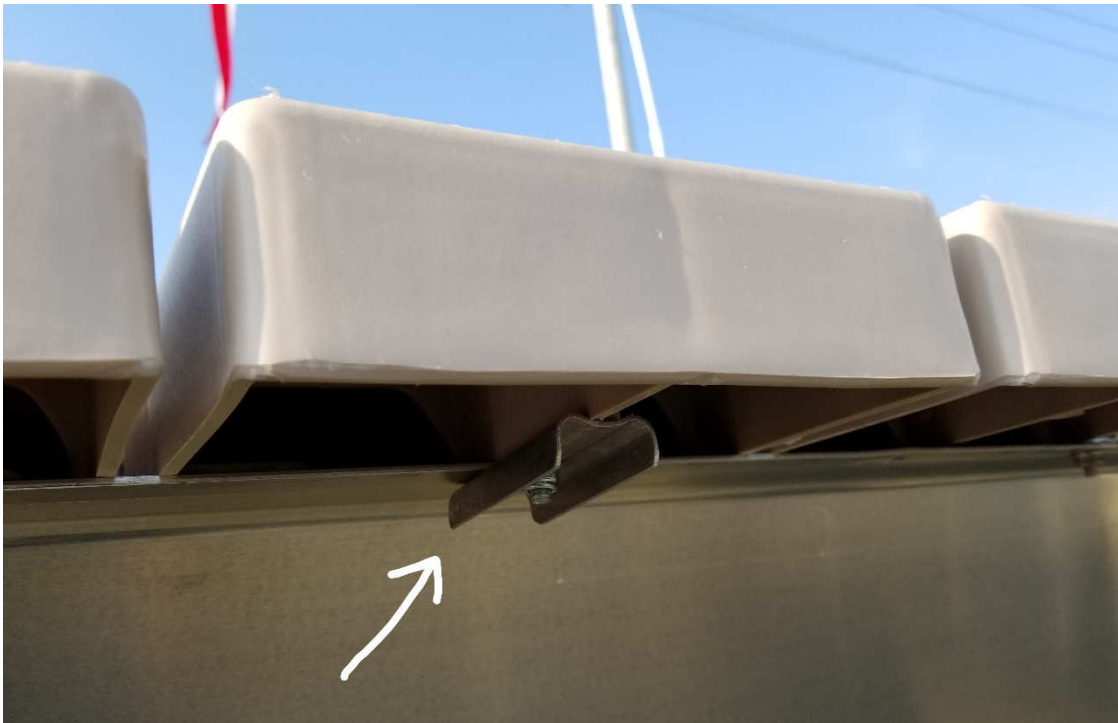

Swing up the BLES and fasten the lower swing bracket align to the bottom V-Beam

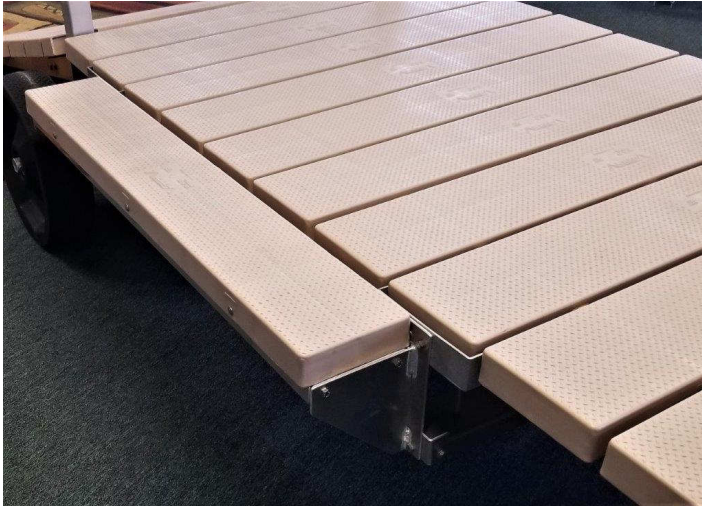

Using a ½” socket wrench tighten securely the on BLES on both sides, as tightening the BLES will pivot the to level. Test before using.

